

# 150 (H or V) STAINLESS STEEL

## Single Deflection Supply Grille



The series 150 single deflection supply grille provides effective directional control of the air stream in one or two directions. The bars are pivoted at the face, giving a uniform angled appearance regardless of blade angle setting.

The hollow, air-foil grille bars are spaced on .750" centers. Each bar is adjusted for the desired air deflection without affecting the setting of any other bar.

Available with horizontal bars, 150H, or vertical bars, 150V. Constructed from type 304 stainless, satin finish standard. Type 316 stainless steel is also available at an additional cost.

**Specify** Series S-44 opposed blade damper attached to 150 series to make supply registers. The S-44 OBD assures even distribution of air across the grille face as well as positive volume control.

**SEE OPTIONS PAGES:**

### FACTORY STANDARDS

- Air foil blades individually adjust.
- Type 304 stainless.
- Countersunk mounting screwholes.
- #6 x 1.25" stainless sheet metal screws.
- #4 satin polished finish.


### FACTORY OPTIONS (extra charge)

- Type 316 stainless, satin finish.
- Painted finish.
- .5", 1", 1.5" blade centers.

Minimum W x H	Maximum W x H
4" x 4"	60" x 48"

### U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

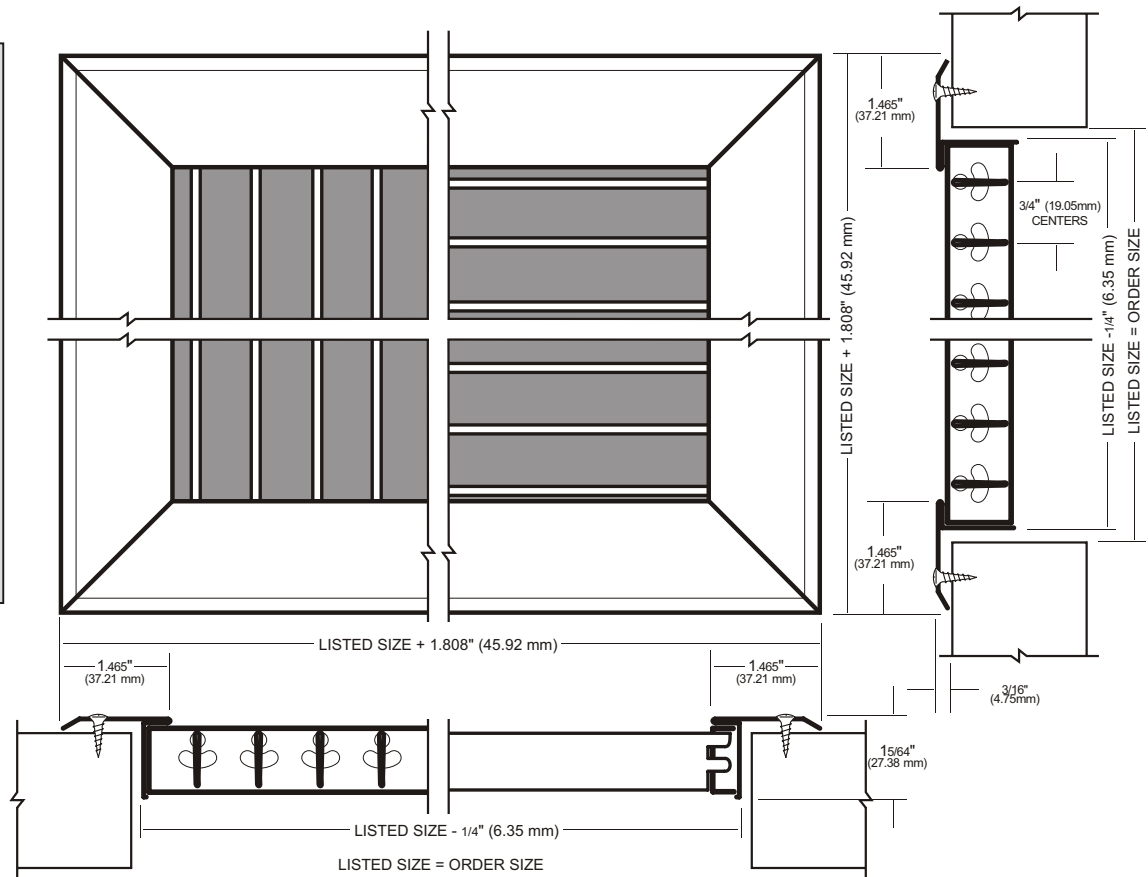

CUSTOMER ORDER NO. --				
JOB --				
ARCHITECT --				
CUSTOMER --				
QTY	ORDER SIZE (W x H)	DAMPER (Y/N)	TAG	304 OR 316