

ALUMINUM DOOR GRILLE

A700

Factory Standards

- ☑ Frame 0.050 extruded aluminum.
- ☑ Blades 0.050 extruded aluminum.
- ☑ Counter-sunk mounting screwholes.
- ☑ #8 x 3/4" Phillips oval TEK screws.
- ☑ Available in uneven and fractional sizes.
- ☑ Adjusts for 13/8", 13/4" up to 2 1/4" door.
- ☑ Clear Anodized finish.
- ☑ Free area 80% approximately.

Factory Options

- ☑ For exterior use specify drainage weep holes.
- ☑ Aluminum 18 x 16 mesh screen.

U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

No-Vision Door and Partition Grille


The A700 (ALUMINUM) no-vision grille is constructed from (.050) 6061 T-5 etched and clear anodized aluminum extrusions.

A700-B is framed in an .050 extruded aluminum single mitered flange frame for surface mount to ceilings, side walls or partitions.

A700-B with Aux is framed in an .050 double mitered extruded flange frame and self adjusts for wood or hollow metal door thickness from 13/8" to 2 1/4".

A700-A is framed in a wrap around 20 gauge electro-galvanized steel channel frame for doors, partitions, transoms or other applications where interior stops are required.

A700-C is provided in a grille core only.

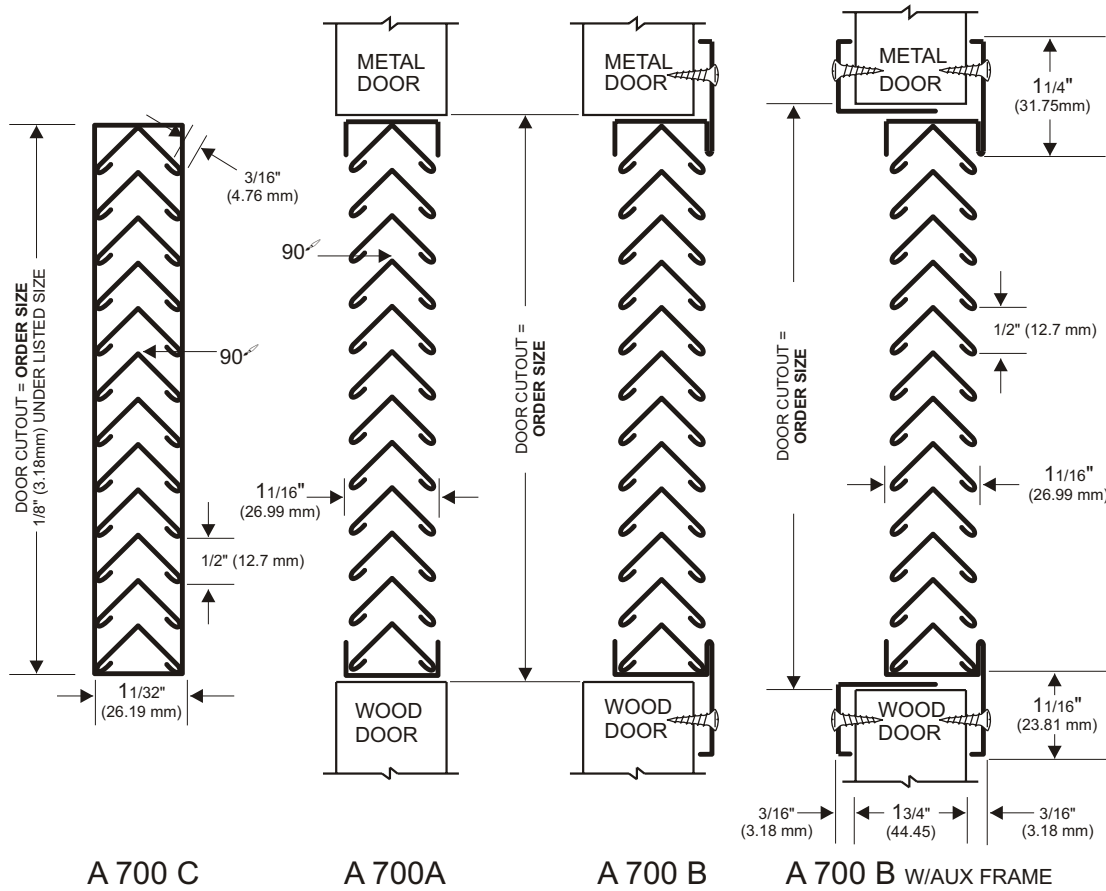

CUSTOMER ORDER NO. --		
JOB --		
ARCHITECT --		
CUSTOMER --		
QTY	ORDER SIZE (W x H)	TAG