


SSMCD LESS STEEL

Modular Ceiling Diffuser

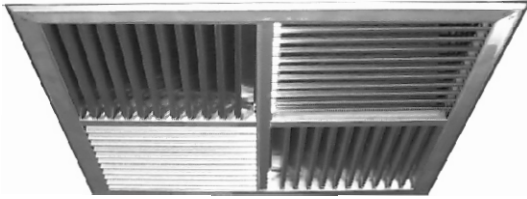

The SSMCD ceiling diffuser is offered for surface mount or lay-in T-bar panels. Available in 1,2,3 and 4-way throw patterns, with optional stainless steel S-44 opposed blade damper and optional square to round transition. 150 cores feature fully adjustable blades while the 550 core is fixed at 0° and/or 45°.

Specify without screwholes for lay-in installation.

Order Size: (22" x 22" for 24" x 24" lay-in)
(46" x 22" for 48" x 24" lay-in)

NOTE: Cores are factory set and not removable on the 550 Series. Blades are individually adjustable on the 150 Series.

Factory Standards


- 20 ga. type 304 stainless, satin finish.
- Surface mount, counter sunk screw holes.
- Lay-in, no screwholes.
- #6 x 1 1/4" stainless sheet metal screws.

Factory Options (extra charge)


- Type 316 stainless, satin finish.
- 150 adjustable blades.
- 550 fixed blades at 0° or 45°.
- S-44 Opposed Blade Damper.
- Square to round stainless neck adapter.
- 1 1/2" blade centers.

Minimum W x H	Maximum W x H
9" x 9"	60" x 60"

U.S. Units to Metric Conversion
INCHES x (25.4) = MILLIMETERS

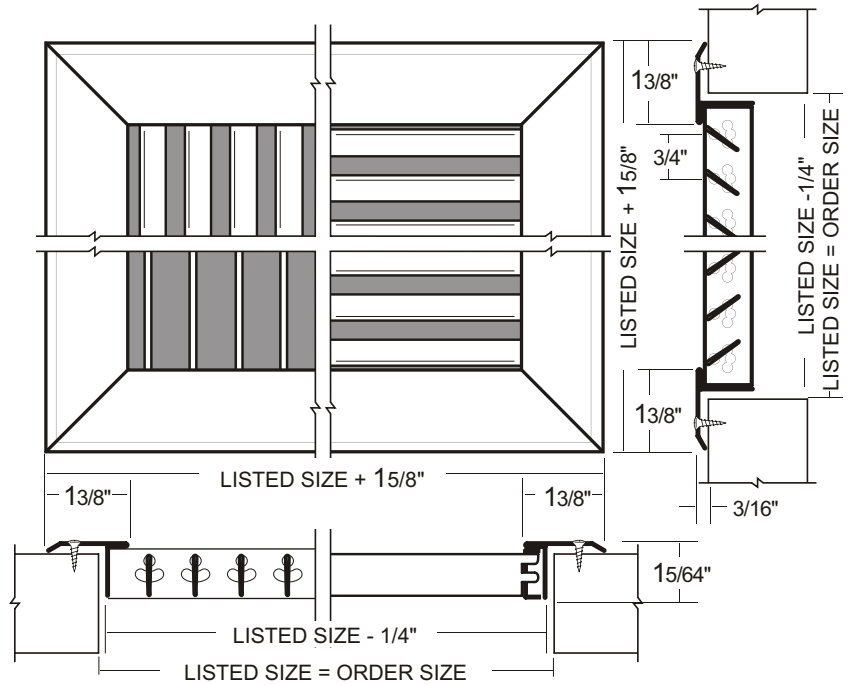

THROW PATTERNS

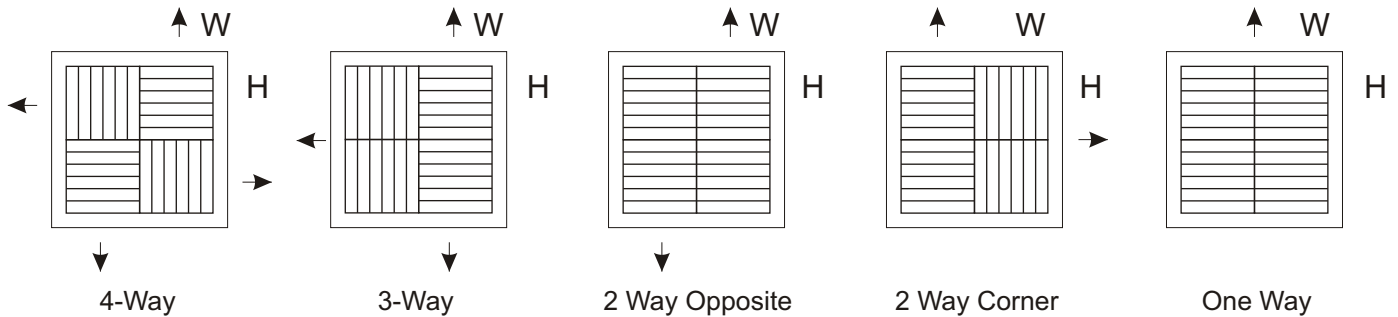

CUSTOMER ORDER NO. --								
PROJECT --								
ARCHITECT --								
CUSTOMER --								
QTY	LAY-IN T-BAR OR SURFACE MOUNT	THROW PATTERN	150 / 550	0° / 45°	NECK SIZE W X H	DAMPER (Y/N)	STAINLESS 304 OR 316	TAG