


# SSMLCD LESS STEEL

## Modular Louvered Ceiling Diffuser

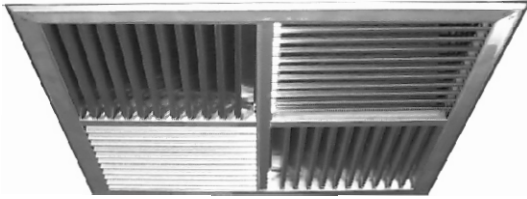

The SSMLCD ceiling diffuser is offered for surface mount or lay-in T-bar panels. Available in 1,2,3 and 4-way fixed throw patterns, with optional stainless steel S-44 opposed blade damper and optional square to round transition.

**Specify** without screwholes for lay-in installation.

**Order Size:** (22" x 22" for 24" x 24" lay-in)  
(46" x 22" for 48" x 24" lay-in)

**NOTE:** Cores are factory set.

### Factory Standards

- 20 ga. type 304 stainless, satin finish.
- Surface mount, counter sunk screw holes.
- Lay-in, no screwholes.
- #6 x 1 1/4" stainless sheet metal screws.


### Factory Options (extra charge)

- Type 316 stainless, satin finish.
- S-44 Opposed Blade Damper.
- Square to round stainless neck adapter.


Minimum W x H	Maximum W x H
9" x 9"	60" x 60"

### U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

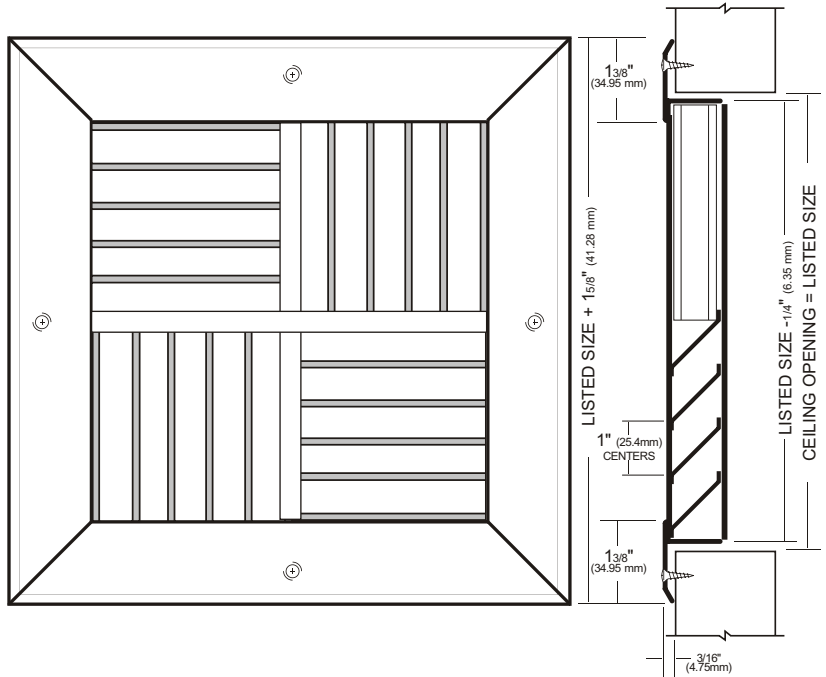

### THROW PATTERNS

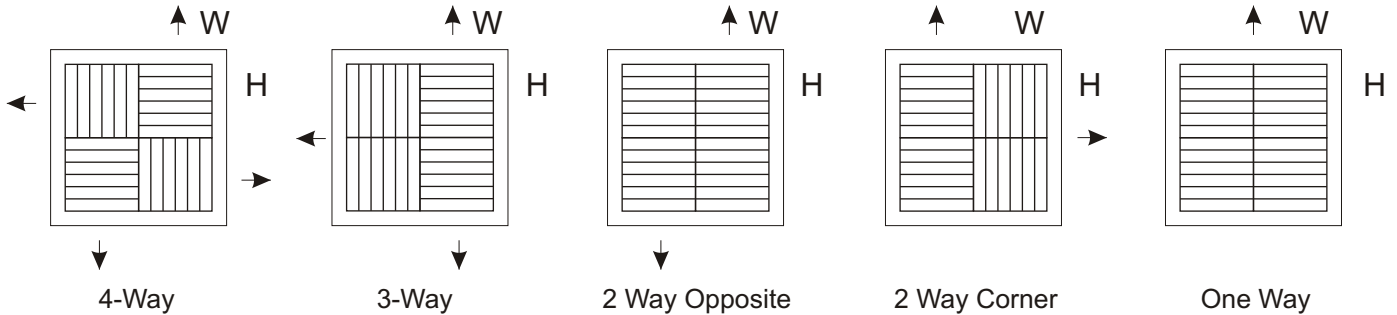

CUSTOMER ORDER NO. --							
PROJECT --							
ARCHITECT --							
CUSTOMER --							
QTY	LAY-IN T-BAR OR SURFACE MOUNT	THROW PATTERN	NECK SIZE W X H	LAY IN T-BAR SIZE	DAMPER (Y/N)	STAINLESS 304 OR 316	TAG