


SSPERF-LESS STEEL

Perforated Supply Grille



Perforated face with curved blades

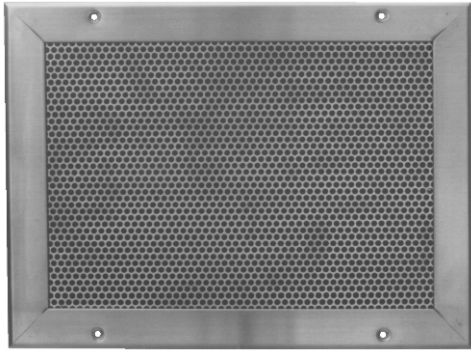


Perforated face ceiling diffusers with louvered deflectors are an economical solution of providing positive air flow without limiting volume.



The 3/16" round perforations on 1/4" staggered centers allow for 51% free area. Constructed from 304 stainless steel, satin finish standard. Type 316 stainless steel also available at an additional cost.

Specify Series S-44 opposed blade damper to make supply register. The S-44 OBD assures even distribution of air across the grille face as well as positive volume control.


Specify without screwholes for lay-in installation. **Order Size:** (22" x 22" for 24" x 24" lay-in) (46" x 22" for 48" x 24" lay-in)

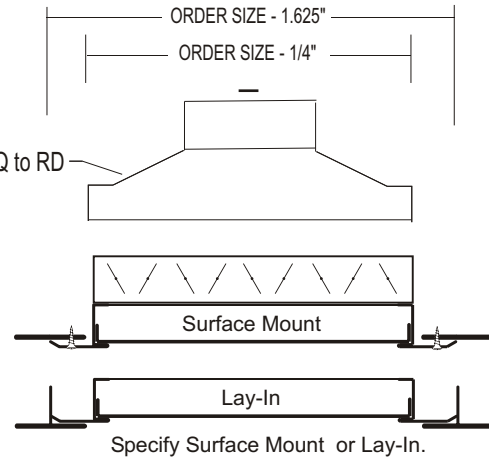

3/16" RD ON 1/4" STAGGERED CENTERS

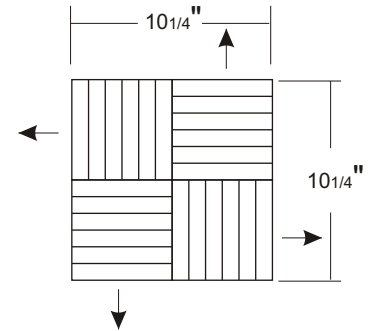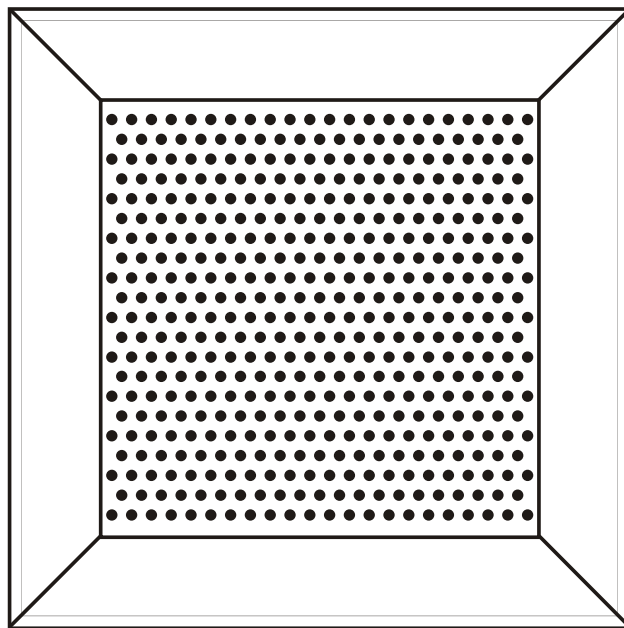

Air Distributor On Back Side Of Grille. Available in 1-2-3 And 4-Way Distribution. Attached With Stainless Steel Pop Rivets.

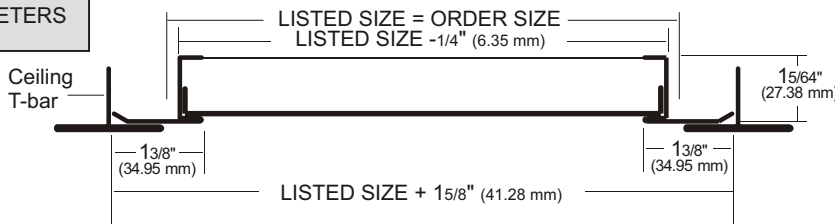

Factory Standards

- Type 304 stainless.
- Countersunk mounting screwholes.
- #6 x 1 1/4" stainless sheet metal screws.
- Free area approximately 51%.
- #3 satin polished finish.

Factory Options (extra charge)

- Type 316 stainless, satin finish.
- Painted finish.
- Curved blades in neck.

Minimum W x H	Maximum W x H
4" x 4"	60" x 48"

U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

CUSTOMER ORDER NO. --						
PROJECT --						
ARCHITECT --						
CUSTOMER --						
QTY	LAY-IN T-BAR OR SURFACE MOUNT	NECK SIZE W X H	LAY IN T-BAR SIZE	DAMPER (Y/N)	STAINLESS 304 OR 316	TAG