

SSPLT
PERFORATED DIFFUSER

STANDARD CONSTRUCTION

- 304 Stainless Steel
- 51% Perf Face
- Louvered 4-Way Airflow (Supply Only)

MOUNTING OPTIONS

- ☐ Surface Mount
- ☐ Lay-In

INLET/OUTLET OPTIONS

- ☐ Round - Size: _____
- ☐ Square - Size: _____
 - ☐ Flanged
- ☐ Rectangle - Size: _____
 - ☐ Flanged

FEATURE OPTIONS

- ☐ No Countersunk Screw Holes (Surface Mount Only)
- ☐ Foil Backed Insulation
 - ☐ 1.5" (R=4.2)
 - ☐ 2.25" (R=6.0)
- ☐ Alternate Airflow Distribution
 - ☐ Curved Blades
 - ☐ Airfoil Blades
 - ☐ Swirl Face

AIRFLOW OPTIONS

- ☐ Supply
- ☐ Return

MATERIAL OPTIONS

- ☐ 316 Stainless Steel

FINISH OPTIONS



- ☐ Polished
- ☐ White Antimicrobial Powder Coat
- ☐ Other: _____

DAMPER OPTIONS

- ☐ SSRD - Butterfly Damper
- ☐ SSBD - Bowtie Damper
- ☐ S-44 - Opposed Blade Damper (Only Available w/Rect. Inlet)

AIRFLOW PATTERNS (Supply Diffuser Only)


- ☐ 4-Way
- ☐ 3-Way
- ☐ 2-Way Opposite
- ☐ 2-Way Corner
- ☐ 1-Way

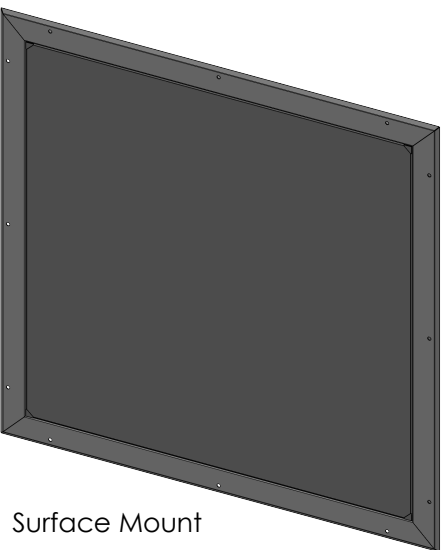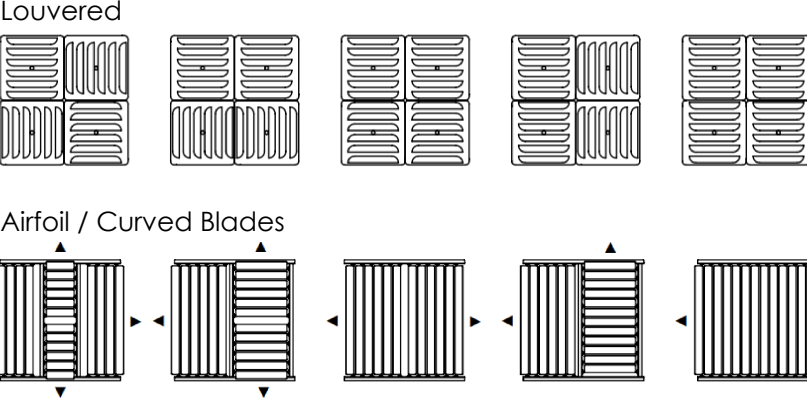

Surface Mount




AJ MANUFACTURING CO.
8701 ELMWOOD AVE #400 KANSAS CITY, MO 64132
PH: 816.231.5522 FAX: 816.231.8437
TOLL FREE: 800.247.5746
WWW.AJMFG.COM

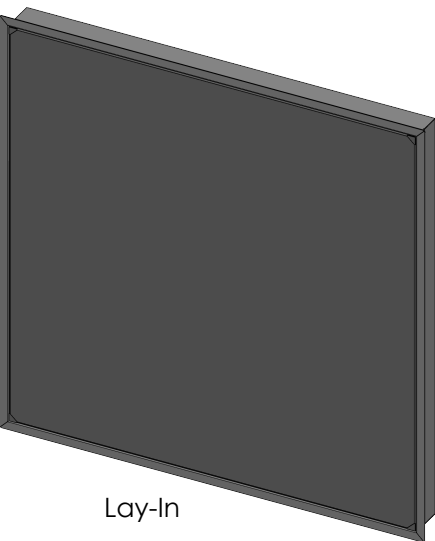


Lay-In

MOUNTING STYLE	NOMINAL SIZE	OVERALL WIDTH (W)	OVERALL HEIGHT (H)	NECK WIDTH (NW)	NECK HEIGHT (NH)
Surface Mount	12 x 12	13.81	13.81	10.81	10.81
	24 x 24	25.81	25.81	22.81	22.81
	Other	Nominal + 1.81	Nominal + 1.81	Nominal - 1.19	Nominal - 1.19
Lay-In	12 x 12	11.75	11.75	10.81	10.81
	24 x 24	23.75	23.75	22.81	22.81
	Other	Nominal - 0.25	Nominal - 0.25	Nominal - 1.19	Nominal - 1.19

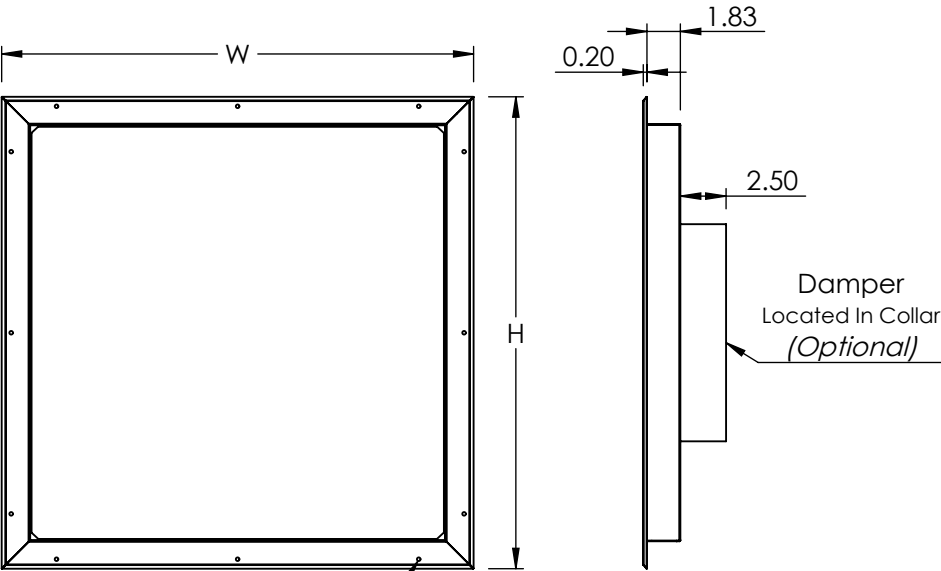

Countersunk Screw Holes (Typ)

SURFACE MOUNT

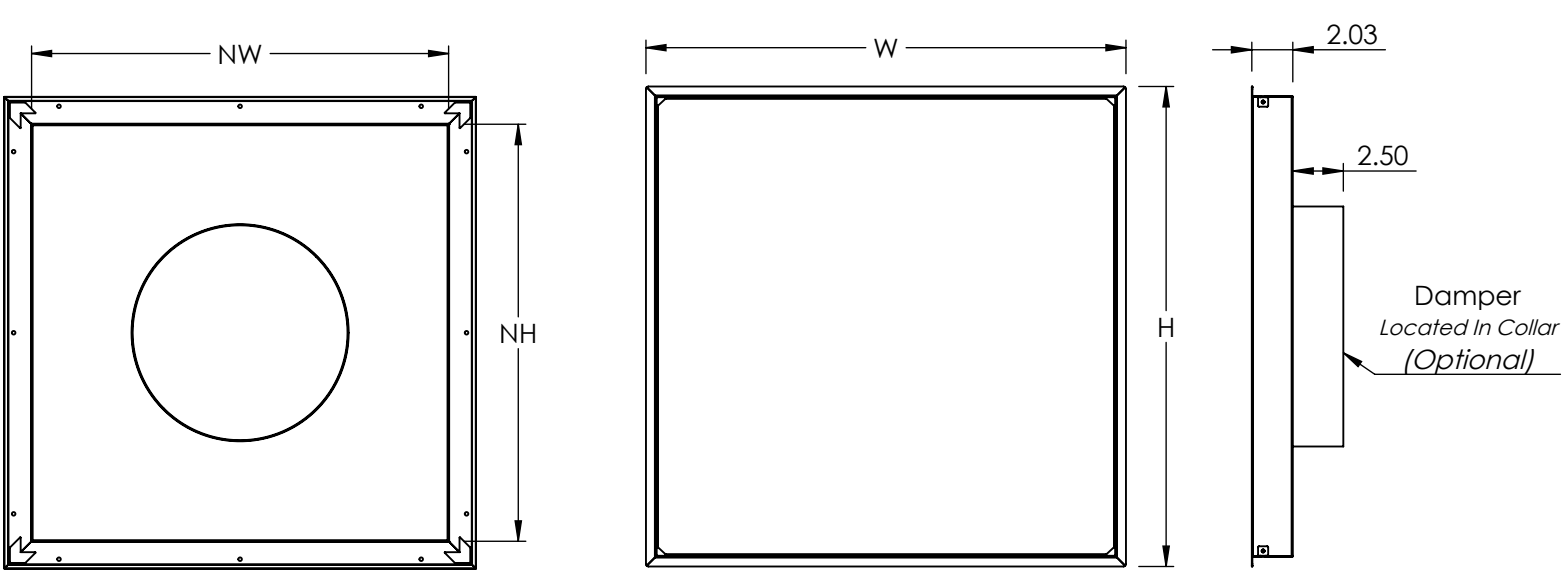

LAY-IN