SSPFFU

PORTABLE FAN FILTER UNIT RECIRCULATING

ACTIVE FILTER FACE AREA (SQ.FT.) SOUND AT 100 FPM (dBA) FULL LOAD AMPS (FLA) (120/208/240/277) FILTER WATTS AT MAX CFM CFM AT 100 FPM WATTS AT 100 FPM * NOMINAL MOTOR/ FAN FILTER MAX CFM MEDIA 2.2/1.59/1.38/1.2 RSR 48 X 24 ECM-BC 70mm 4.84 800 230 484 50

STANDARD CONSTRUCTION

- 304 Stainless Steel w/Filter Gel Seal Knife Edge
- Polished Finish
- EC Motor with Backward Curved Composite Impeller
- Hinged Return Grille
- MERV 8 Pre-Filter
- 70mm Gel Seal H14 HEPA Filter -99.995% on 0.3 µm, Room Side Replaceable

UNIT DEPTH

22.08

Stainless Steel

Push/Pull Handle

9.60

- 51% Perf Face
- Airflow Sensor
- Constant Volume
- Adjustable Face Control
- Multi-Piece Riveted Plenum
- 10ft Cord w/NEMA 5-15 Plug
- Push/Pull Handle

OVERALL


HEIGHT 52.66

UNIT

HEIGHT

47.47

5.19

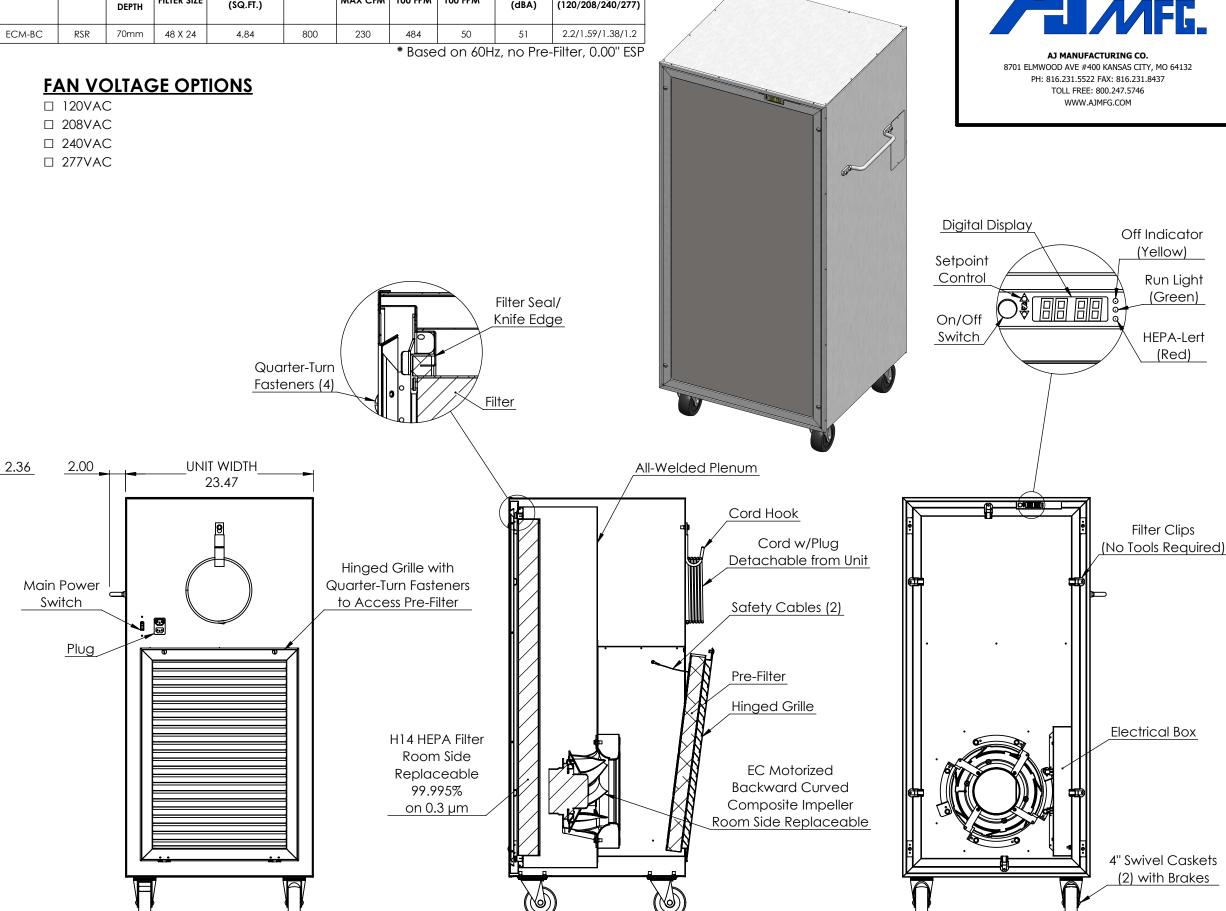

Page 1 of 1