


SSPERF-R – Perforated Return Air Grille

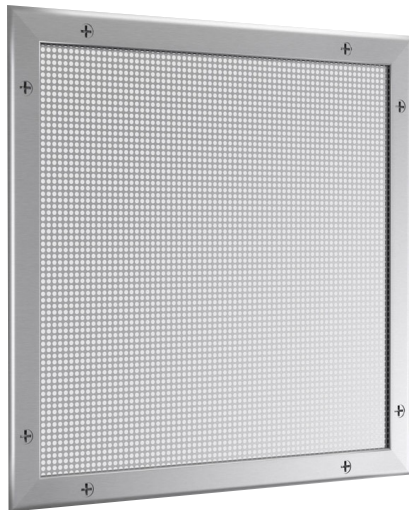

The SSPERF-R Perforated Return Air Grille can be used for a variety of return air applications from ceilings to sidewalls.

For return registers, specify Series S-44 Opposed Blade Damper (OBD) attached to SSPERF-R. S-44 OBD assures even distribution of air across the grille face, as well as positive volume control.

For lay-in installation, specify without screw holes and order size 22" x 22" for 24" x 24" lay-in, or 46" x 22" for 48" x 24" lay-in.

STANDARD FEATURES

- Type 304 stainless steel construction
- #4 satin polished finish
- 51% perforated face – 3/16" diameter holes on 60° 1/4" staggered centers
- Countersunk mounting screw holes
- #6 x 1.25" stainless truss head sheet metal screws

OPTIONAL FEATURES

- Type 316 stainless steel construction
- Antimicrobial epoxy powder coat finish options
- S-44 opposed blade damper
- Ducted transition with three inlet options: round, square or rectangle