
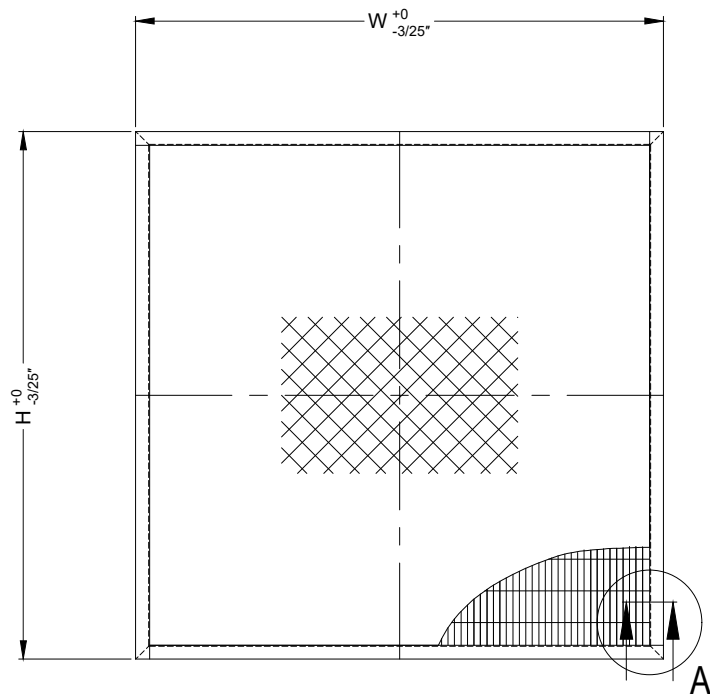


Configuration			
Media		Glass Fiber	
Frame		Anodizing Aluminum	
Faceguard		Epoxy coating Galvanized	
Sealant		PU	
Separator		Hotmelt	
Gasket		EPDM	
Gasket location		Clean side/Dirty side	
Efficiency		99.95%@MPPS [H13]	
Dimensions			
H	W	D	Initial Pressure Drop
47 7/16"	47 7/16"	2 13/32"	0.44 in. w.g.@ 88.6 ft/min
47 7/16"	23 7/16"		
23 7/16"	23 7/16"		

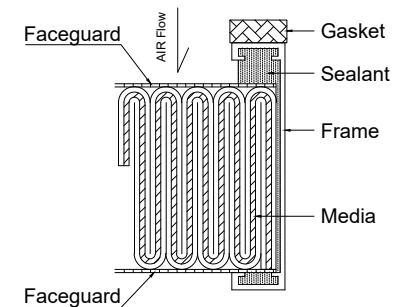

DETAIL A-A

Please carefully confirm the drawings.

Customer Signature:

Name: _____ Date: _____



Unit
Scale

Inch
N.T.S

Drawn
Checked
Approved

Date
2025.06.10

Project Name
Part Name
Part No.
Drawing No.

/
Ultrair H
/
/