



Configuration			
Media		Glass Fiber	
Frame		Anodizing Aluminum	
Faceguard		Epoxy coating Galvanized	
Sealant		PU	
Separator		Hotmelt	
Gasket		EPDM	
Gasket location		Clean side/Dirty side	
Efficiency		99.995%@MPPS [H14]	
Dimensions			
H	W	D	Initial Pressure Drop
47 7/16"	47 7/16"	2 13/32"	0.42 in. w.g.@ 88.6 ft/min
47 7/16"	23 7/16"		
23 7/16"	23 7/16"		

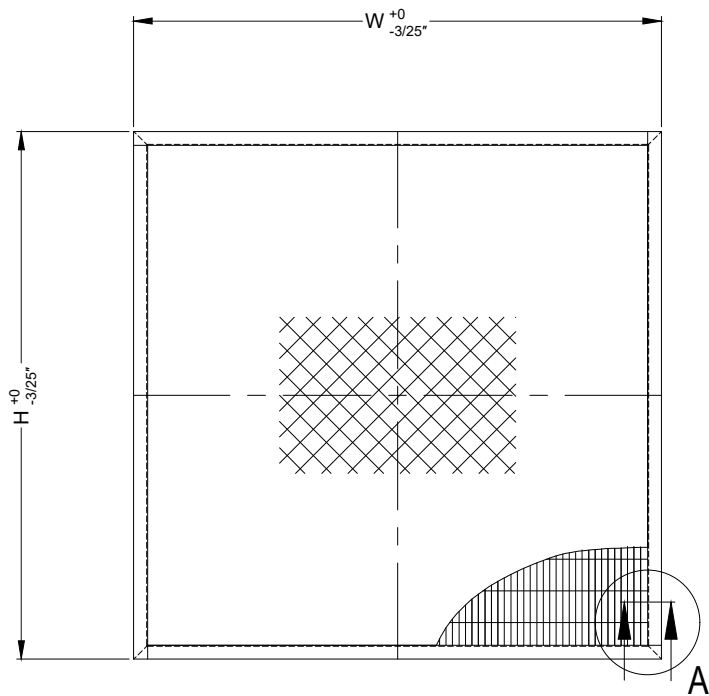

DETAIL A-A

Please carefully confirm the drawings.					Drawn		Project Name	/
Customer Signature:					Checked		Part Name	Ultrair H
			Unit	Inch	Approved		Part No.	/
			Scale	N.T.S	Date	2025.06.10	Drawing No.	/
Name: _____ Date: _____								

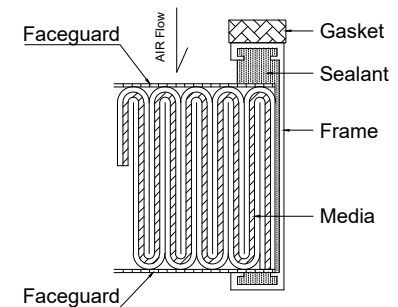