

OPERABLE DOOR GRILLE

1900

Operable Door Grille



The 1900 operable louver is U.L. listed and fire rated for use in 1 3/4" thick doors rated up to 90 minutes. The 160 degree fusible link overrides the manual operator when activated by heat. Made from 16 gauge CRS frame and blades. Factory primed, dark bronze finish, with 40% approximate free area. **Minimum size 12" x 6" Maximum size 24" x 24"**.



Factory Standards


- ✓ Material: 16 ga. C.R. Steel.
- ✓ Free area: 45%
- ✓ Fits 1 3/4" doors only.
- ✓ 160° Fusible link (90 min fire rated.)
- ✓ Dark bronze finish.
- ✓ Fractional sizes not available.

NOTE: For exterior use, high humidity, or salt air, specify zinc plated or stainless steel.

Minimum W x H	Maximum W x H
12" x 6"	24" x 24"

U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

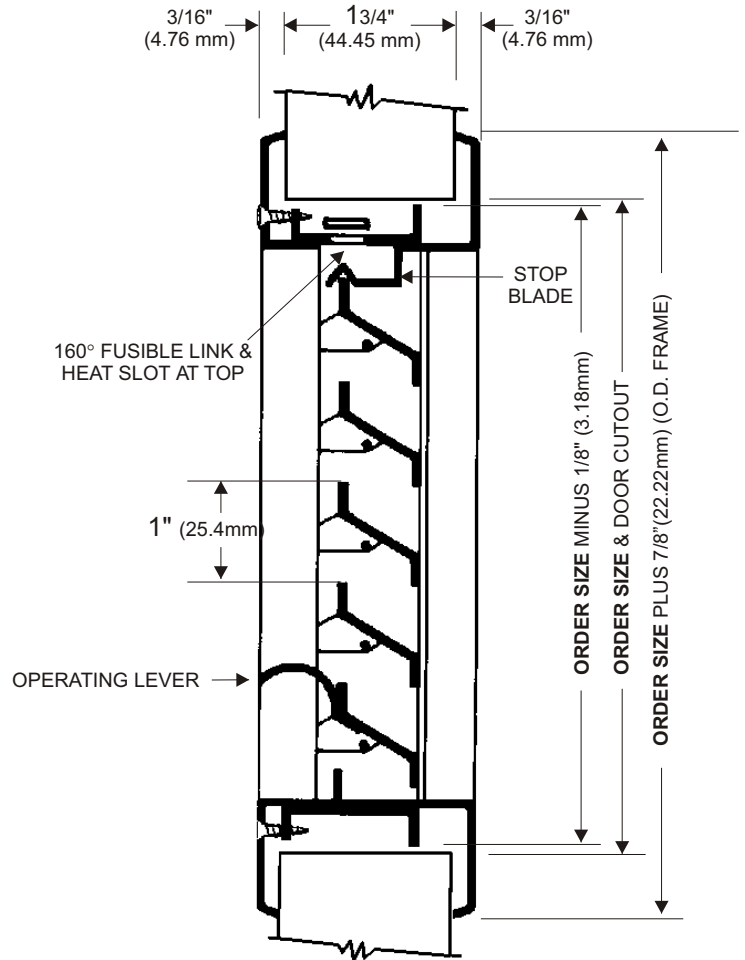

CUSTOMER ORDER NO. --		
JOB --		
ARCHITECT --		
CUSTOMER --		
QTY	ORDER SIZE (W x H)	TAG