

NO-VISION DOOR GRILLE

No-Vision Door and Partition Grille

Factory Standards

- ✓ Frame 20 ga. steel.
- ✓ Blades 24 ga. steel, hemmed edges.
- ✓ Counter-sunk mounting screwholes.
- ✓ #8 x 3/4" Phillips oval TEK screws.
- ✓ Available in uneven and fractional sizes.
- ✓ Prime finish.
- ✓ Thru bolts if specified.
- ✓ Adjusts for 13/8", 13/4" up to 21/4" door.
- ✓ Free area 80% approximately.

Factory Options

- Aluminum 18 x 16 mesh screens.

NOTE: For exterior use, high humidity, or salt air, specify zinc plated or

U.S. Units to Metric Conversion


INCHES x (25.4) = MILLIMETERS

The 700 Steel Series door grille is constructed with 24 gauge CRS hemmed louver blades that add strength and a smooth, burr-free, louver design.

700-B is framed in a 20 gauge CRS single mitered flange frame for surface mount to ceilings, side walls or transoms.

700-B with Aux is framed in a 20 gauge CRS double mitered flange frame and self adjusts for wood or hollow metal door thickness from 13/8" to 21/4".

700-A is framed in a wrap around 20 gauge CRS channel frame for doors, partitions, transoms or other applications where interior stops are required. **700-C** is provided in a grille core only.

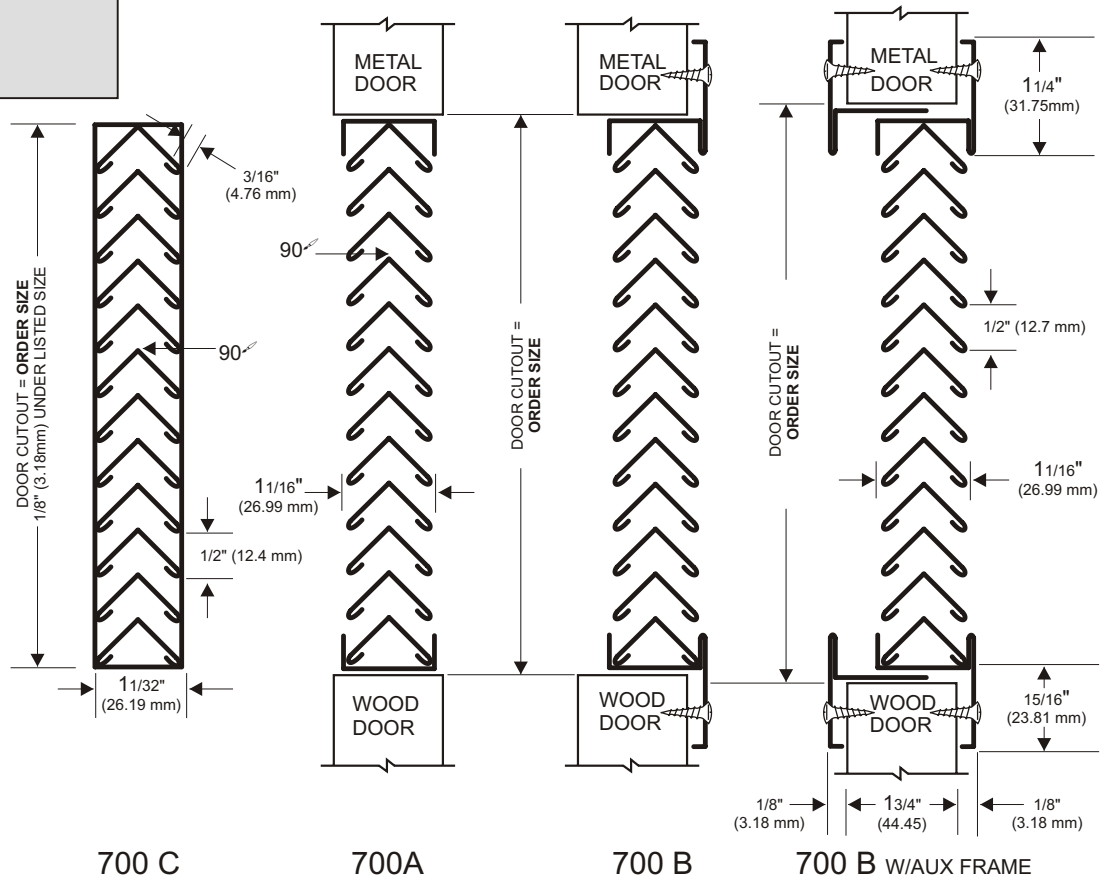

CUSTOMER ORDER NO. --		
JOB --		
ARCHITECT --		
CUSTOMER --		
QTY	ORDER SIZE (W x H)	TAG