

ALUMINUM DOOR GRILLE

N/A700

No-Vision Door and Partition Grille

Factory Standards

- ✓ All .060 T6 Extruded Aluminum.
- ✓ Vision Proof.
- ✓ Adjusts For Doors 1-1/4" to 2-1/4" thick.
- ✓ #Countersunk Screw Holes
- ✓ White Finish.


Factory Options

- Satin Anodized Finish.
- Tamper Proof Screws.
- Aluminum Insect Screen.

U.S. Units to Metric Conversion

INCHES x (25.4) = MILLIMETERS

SIZE	EFF. AREA	VELOCITY DUCT Ps	300	400	500	600	700	800	900
			0.18	0.25	0.4	0.61	0.82	1.1	1.4
14x6	.50 ft.	CFM	149	194	243	293	338	387	455
10x8		NC	<20	<20	<20	20	<20	25	30
20x4									
12x8	.62 ft.	CFM	185	275	355	410	485	550	630
10x10		NC	<20	<20	<20	20	<20	25	25
16x6									
12x12	.89 ft.	CFM	270	395	495	580	675	775	880
18x8		NC	<20	<20	<20	25	25	30	30
24x6									
16x12	1.11 ft.	CFM	333	490	615	740	855	980	1100
14x14		NC	<20	<20	<20	20	20	20-25	25
20x10									
24x12	1.60 ft.	CFM	482	710	890	1070	1245	1425	1635
20x14		NC	<20	<20	20	20-25	20-25	20-25	30
18x16									
30x14	2.21 ft.	CFM	671	887	1107	1328	1548	1778	2003
20x16		NC	<20	<20	20-25	20-25	30-35	35	35
20x20									
24x20	2.64 ft.	CFM	783	1044	1305	1566	1818	1093	2372
20x24		NC	<20	<20	20-25	30-35	35	35	35-40
30x16									
30x20	3.12 ft.	CFM	936	1247	1560	1872	2183	2493	2799
24x24		NC	20	20-25	30-35	35	35-40	35-40	40
16x36									

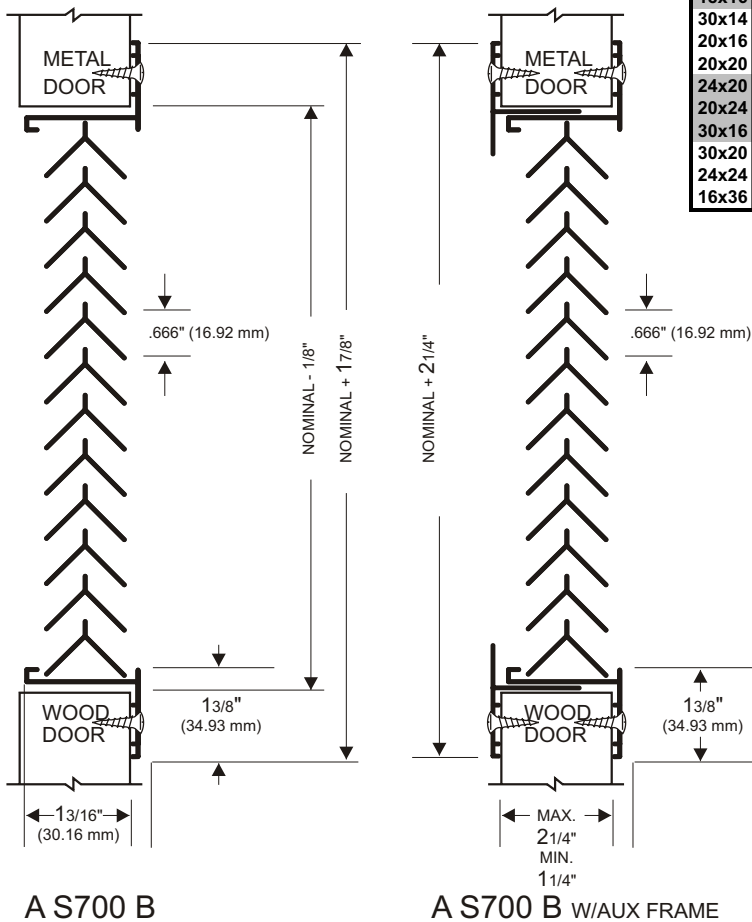

CUSTOMER ORDER NO. --		
JOB --		
ARCHITECT --		
CUSTOMER --		
QTY	ORDER SIZE (W x H)	TAG