


# SSCB (1,2,3 & 4 Way Deflection) STAINLESS STEEL

## Curved Blade Single Deflection Supply Grille

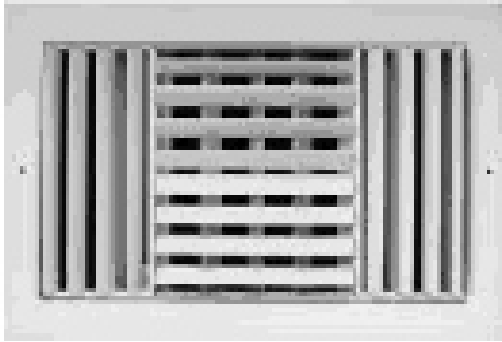

The series SSCB curved blade single deflection supply grille provides effective directional control of the air stream in one or more directions. The bars are pivoted at the face, giving a uniform aligned appearance regardless of blade angle setting.

The hollow, air-foil grille bars are spaced on .750" centers. Each bar is adjusted for the desired air deflection without affecting the setting of any other bar.

Available with 1-way, 2-way, 3-way or 4-way deflection. Constructed from type 304 stainless, satin finish standard. Type 316 stainless steel is also available at an additional cost.

**Specify** Series S-44 opposed blade damper attached to SSCB series to make supply registers. The S-44 OBD assures even distribution of air across the grille face as well as positive volume control.

**FACTORY STANDARDS**



- Air foil blades individually adjust.
- Type 304 stainless.
- Countersunk mounting screwholes.
- #6 x 1 1/4" stainless sheet metal Screws.
- #3 satin polished finish.

**FACTORY OPTIONS** (extra charge)

- Type 316 stainless, satin finish.
- Painted finish.

Minimum W x H	Maximum W x H
4" x 4"	60" x 48"

**U.S. Units to Metric Conversion**  
INCHES x (25.4) = MILLIMETERS

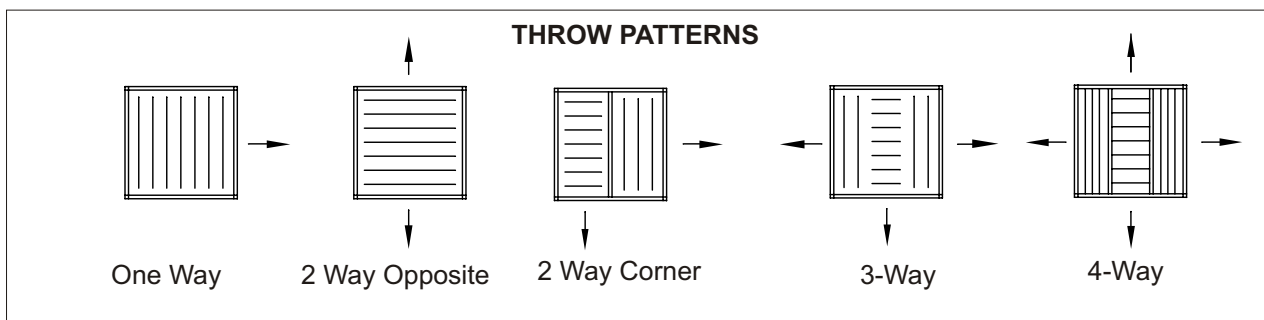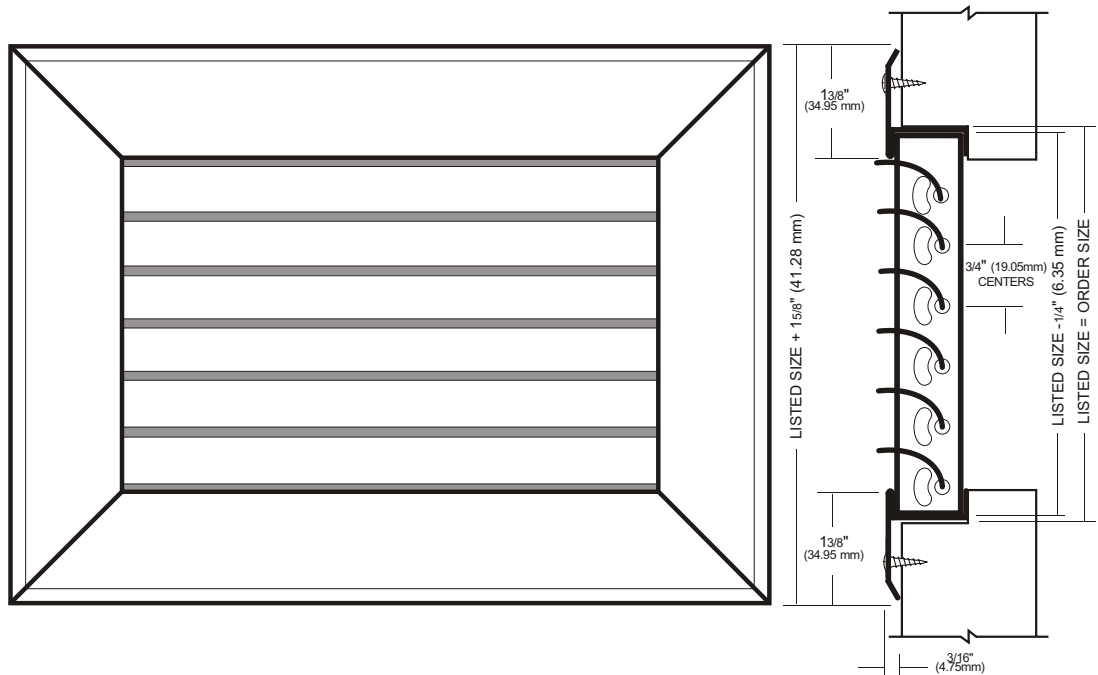

CUSTOMER ORDER NO. --								
PROJECT --								
ARCHITECT --								
CUSTOMER --								
QTY	LAY-IN T-BAR OR SURFACE MOUNT	THROW PATTERN	150 / 550	0° / 45°	NECK SIZE W X H	DAMPER (Y/N)	STAINLESS 304 OR 316	TAG